


WP 2 SERIES

Probe

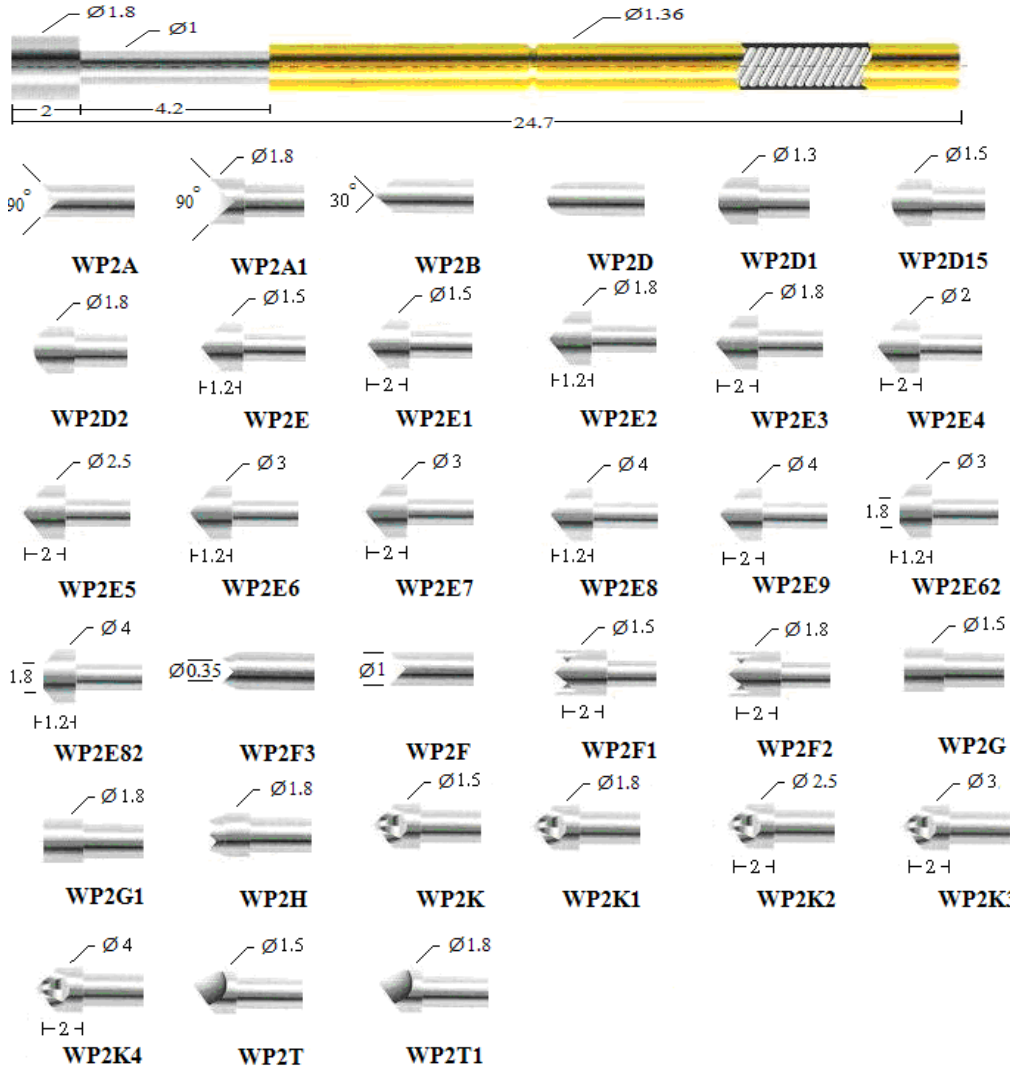


WP 2 Current SPECIFICATION	
Recommend minimum center	2.54mm (0.1Inch)
Spring force at 2/3 travel	80g-120g
Recommend travel	2.80mm
Current Rating	3A
Current Resistance	<30mΩ

WP 2 Material	
Plunger	Becu, Rodium Plated
Barrel	Phosphor bronze, Gold plated
Spring	Stainless

WP 2 SERIES

Socket




WPR2W1-1




WPR2V-1



WPR2W1-2

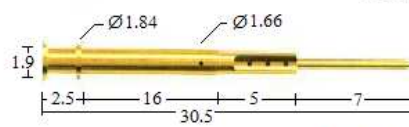

WPR2V-2



WPR2W1S



WPR2VS



WPR2W2-2



WPR2W2-1



WPR 2 SPECIFICATION	
Mounting Hole size	1.7mm
Material	Brass, Gold plated
Recommend wire	AWG 24-30