



Probe

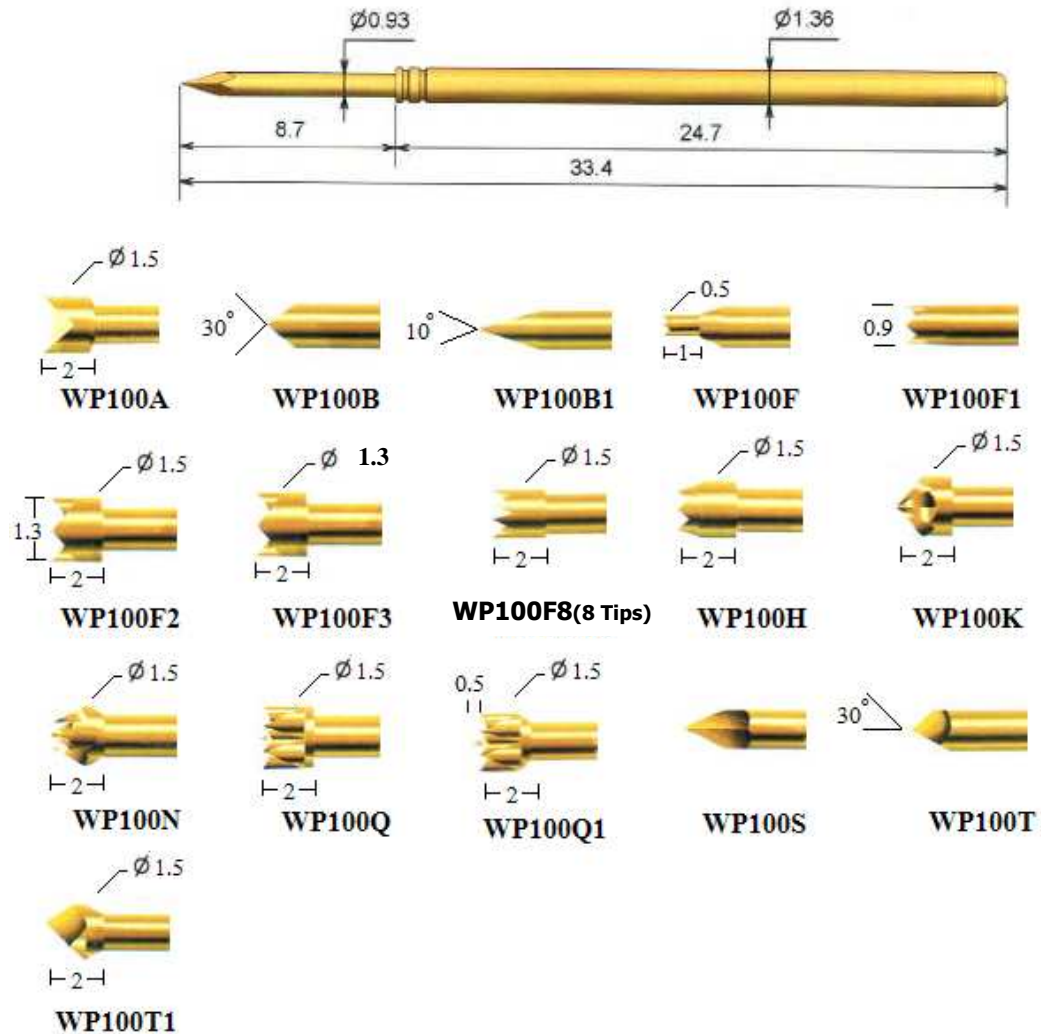


WP 100 Current SPECIFICATION	
Recommend minimum center	2.54mm (0.1Inch)
Spring force at 2/3 travel	180g, 220g, 250g, 300g
Recommend travel	4.00mm
Current Rating	5A-8A
Current Resistance	<18mΩ
Operating Temperature	-40C° up to 80C°

WP 100 Material	
Plunger	BeCu or Steel, Gold plated
Barrel	Phosphor bronze, Gold plated
Spring	Music Wire, Gold plated


Socket




WPR100W-1




WPR100V-1




WPR100W-2




WPR100V-2




WPR100WT




WPR100VT




WPR100WS



WPR100VS



WPR100WC



WPR100VC

WPR 100 SPECIFICATION	
Mounting Hole size	1.68-1.72mm
Material	Brass, Gold plated
Recommend wire	AWG 22-28
Connections	W1, W2, V1, V2 : Wire Warp
	WT, VT : Round Pin/Terminal
	WS, VS : Solder
	WC, VC : Crimp