


**Probe**

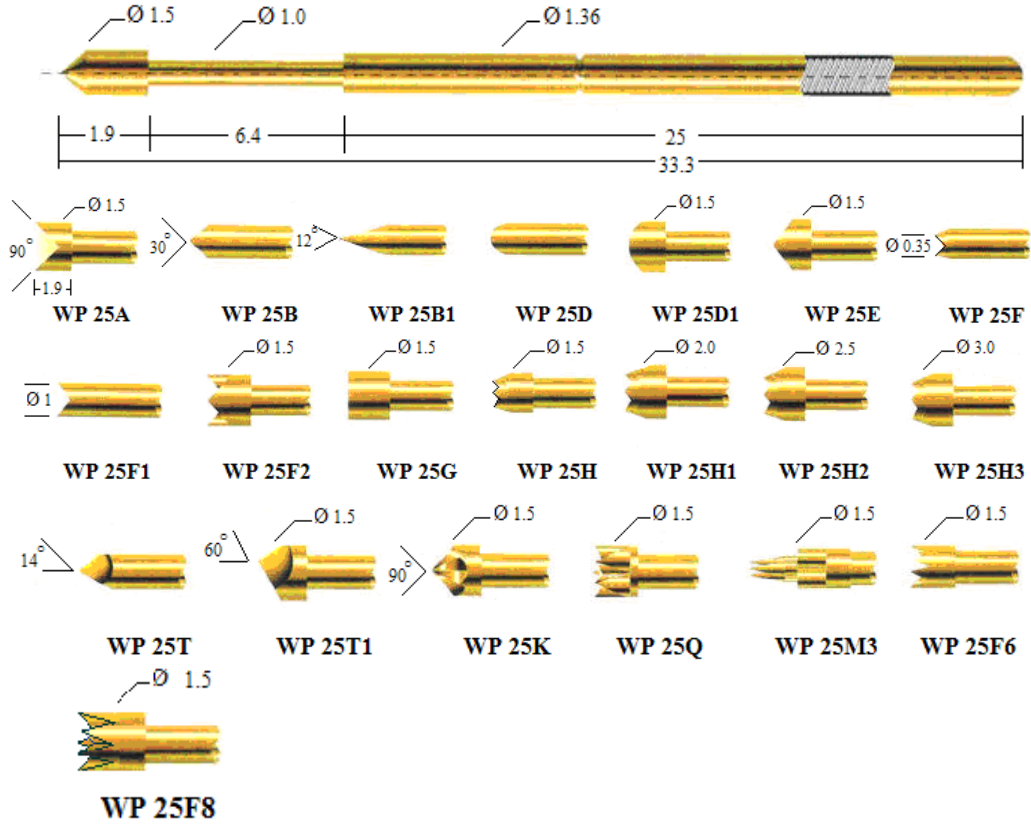

WP 25 Current SPECIFICATION	
Recommend minimum center	2.54mm (0.1Inch)
Spring force at 2/3 travel	180g, 250g, 300g
Recommend travel	4.00mm
Current Rating	3A
Current Resistance	<30mΩ

WP 25 Material	
Plunger	Rhodium plated high carbon steel or Becu
Barrel	Phosphor bronze, Gold plated
Spring	Music Wire

**WP 25 SERIES**


**Socket**



**WPR25W-1**




**WPR25V-1**




**WPR25W-2**




**WPR25V-2**

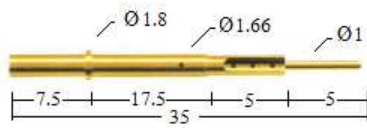


**WPR25WT**

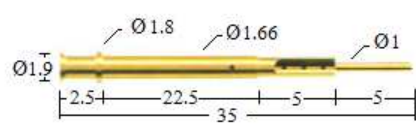


**WPR25VT**




**WPR25WS**



**WPR25VS**



**WPR25WC**



**WPR25VC**

<b>WPR 25 SPECIFICATION</b>	
Mounting Hole size	1.68-1.72mm
Material	Brass, Gold plated
Recommend wire	AWG 22-28
Connections	W1, W2, V1, V2 : Wire Warp
	WT, VT : Round Pin/Terminal
	WS, VS : Solder
	WC, VC : Crimp