


WP 40L SERIES

25 mil


Probe

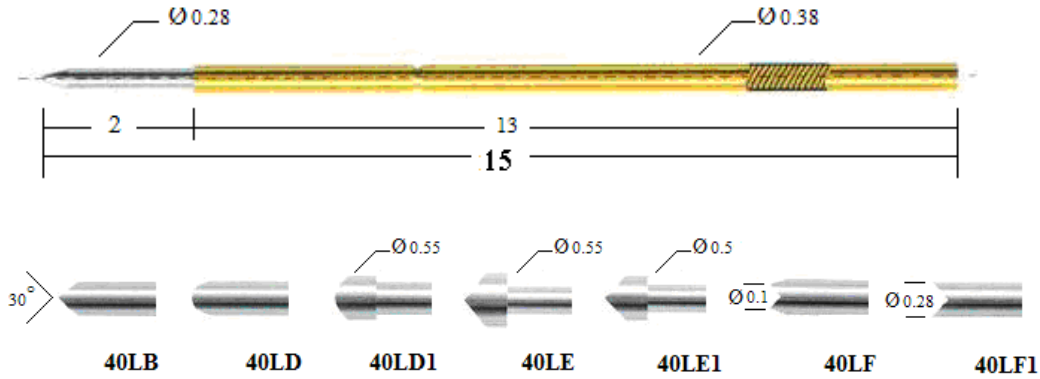

WP 40L Current SPECIFICATION	
Recommend minimum center	0.75mm (0.295Inch)
Spring force at 2/3 travel	30g, 50g
Recommend travel	1.33mm
Current Rating	0.5A
Current Resistance	<100mΩ

WP 40L Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

Socket

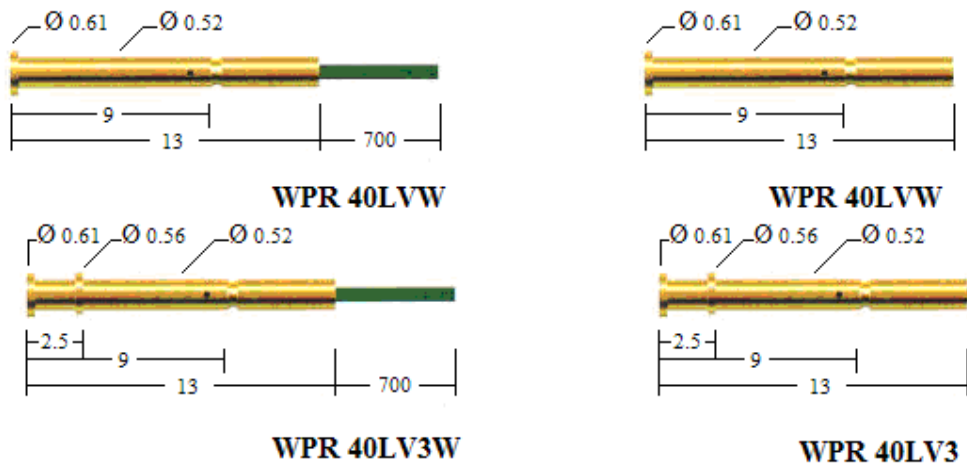

WPR 40L SPECIFICATION	
Mounting Hole size	0.57mm (0.225Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30