


WP 050 SERIES


Probe

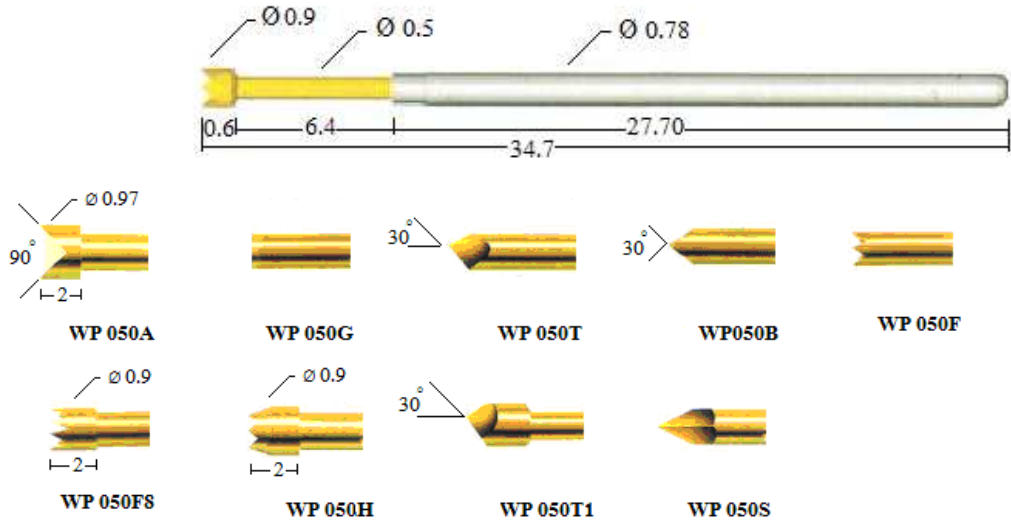

WP 050 Current SPECIFICATION	
Recommend minimum center	1.25 (0.50Inch)
Spring force at 2/3 travel	180g, 250g
Recommend travel	4.30mm
Current Rating	6A
Current Resistance	<25mΩ

WP 050 Material	
Plunger	Gold plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

Socket

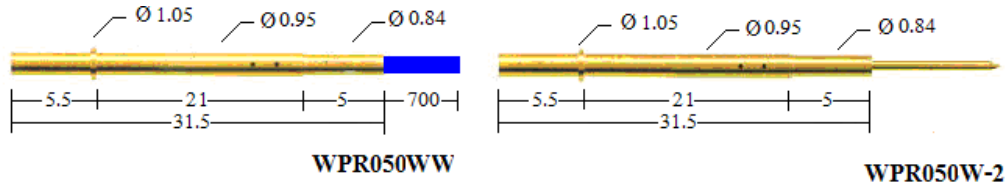

WPR 050L SPECIFICATION	
Mounting Hole size	0.1mm (0.0394Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30