


WP 111 SERIES

Probe

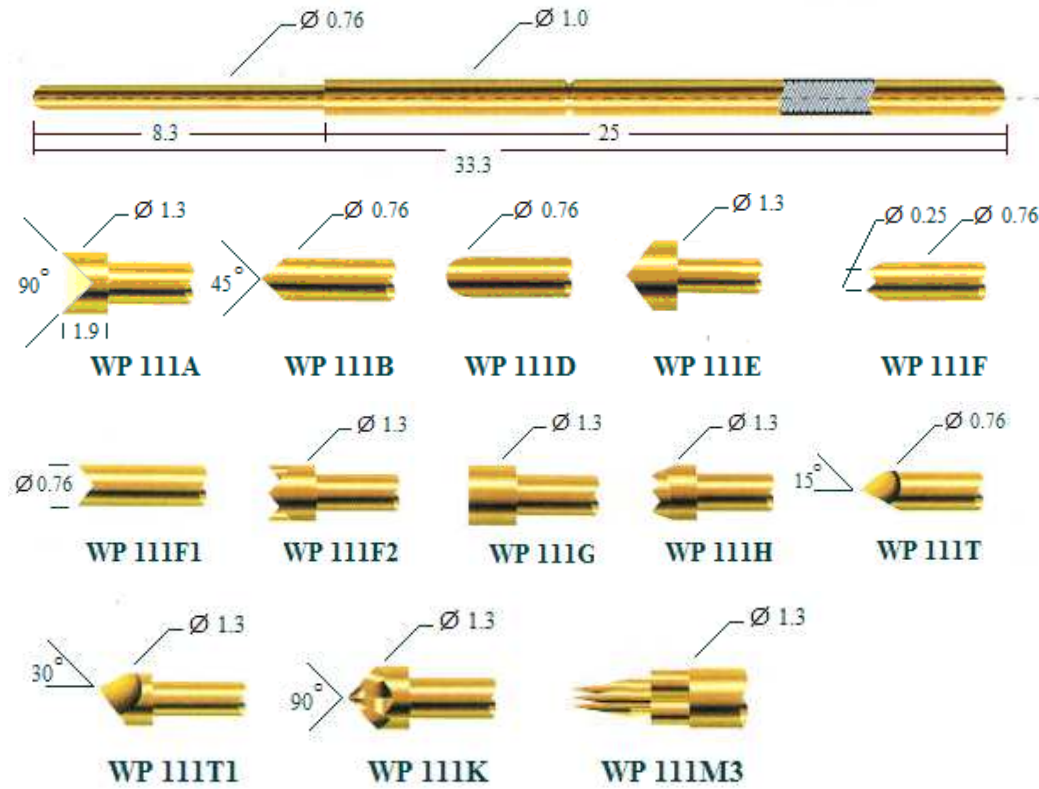


WP 111 Current SPECIFICATION	
Recommend minimum center	1.78mm (0.075Inch)
Spring force at 2/3 travel	180g, 250g, 300g
Recommend travel	4.00mm
Current Rating	3A
Current Resistance	<30mΩ


WP 111 Material	
Plunger	Rhodium plated high carbon steel or Becu
Barrel	Phosphor bronze, Gold plated
Spring	Music Wire

WP 111 SERIES


Socket




WPR111W-1




WPR111V-1




WPR111W-2




WPR111V-2




WPR111WT




WPR111VT




WPR111WS



WPR111VS



WPR111VC



WPR111WC

WPR 111 SPECIFICATION	
Mounting Hole size	1.31-1.36mm
Material	Brass, Gold plated
Recommend wire	AWG 24-30
Connections	W1, W2, V1, V2 : Wire Warp
	WT, VT : Round Pin/Terminal
	WS, VS : Solder
	WC, VC : Crimp