


WP 75 Series

Probe

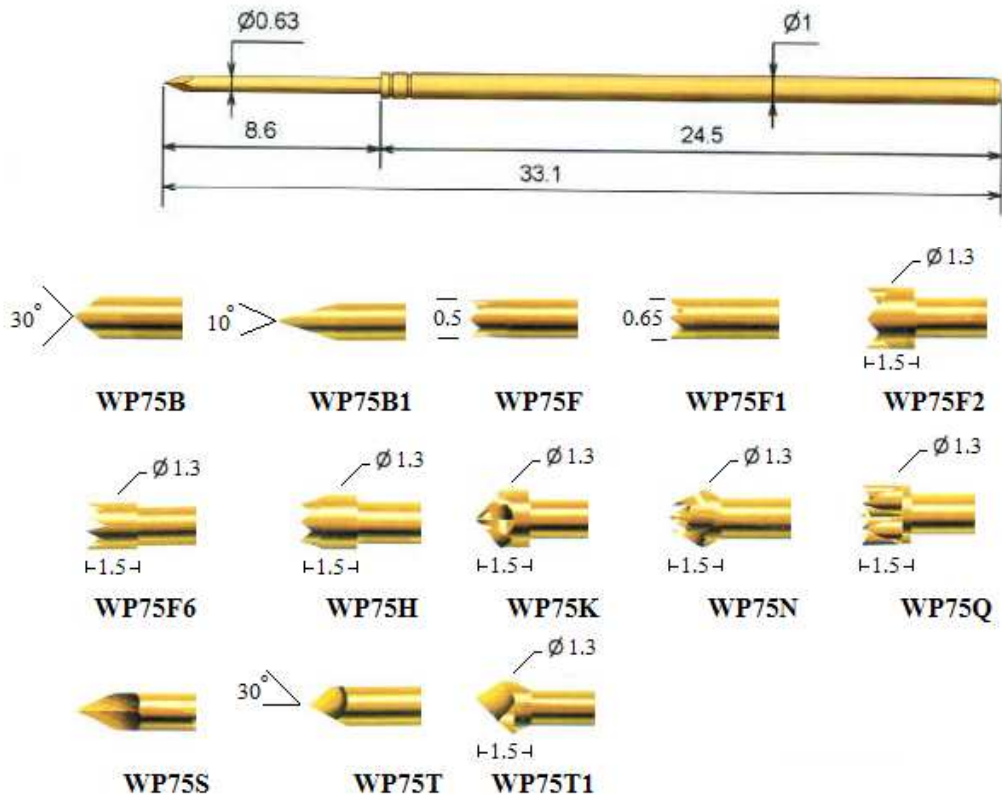


WP 75 Current SPECIFICATION	
Recommend minimum center	2.54mm (0.1Inch)
Spring force at 2/3 travel	180g, 220g, 250g, 300g
Recommend travel	4.00mm
Current Rating	5A
Current Resistance	<18m Ω


WP 75 Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Music Wire, Gold plated

WP 75 Series


Socket




WPR75W-1




WPR75V-1




WPR75W-2




WPR75V-2




WPR75WT




WPR75VT




WPR75WS



WPR75VS



WPR75VC



WPR75WC

WPR 75 SPECIFICATION	
Mounting Hole size	1.31-1.36mm
Material	Brass, Gold plated
Recommend wire	AWG 24-30
Connections	W1, W2, V1, V2 : Wire Warp
	WT, VT : Round Pin/Terminal
	WS, VS : Solder
	WC, VC : Crimp