
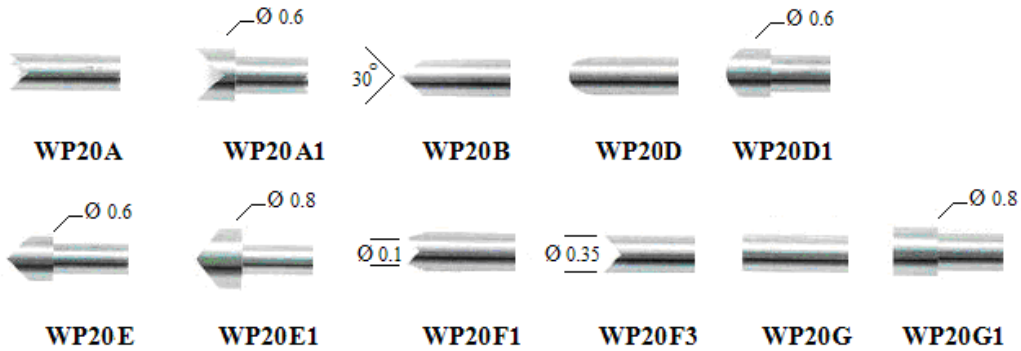


WP 20 SERIES


Probe

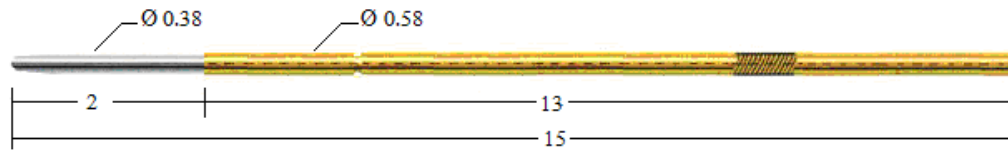

WP 20 Current SPECIFICATION	
Recommend minimum center	1.00mm (0.394Inch)
Spring force at 2/3 travel	50-80g
Recommend travel	1.33mm
Current Rating	2A
Current Resistance	<50mΩ

WP 20 Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

Socket

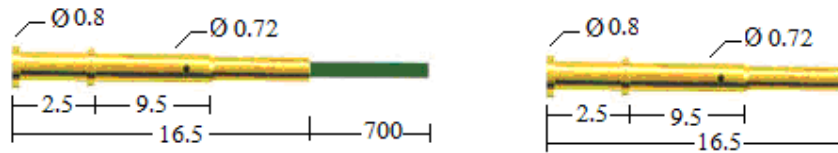

WPR20V5W

WPR20VSC

WPR 20 SPECIFICATION	
Mounting Hole size	0.66mm (0.335Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30