


WP 201 SERIES


Probe

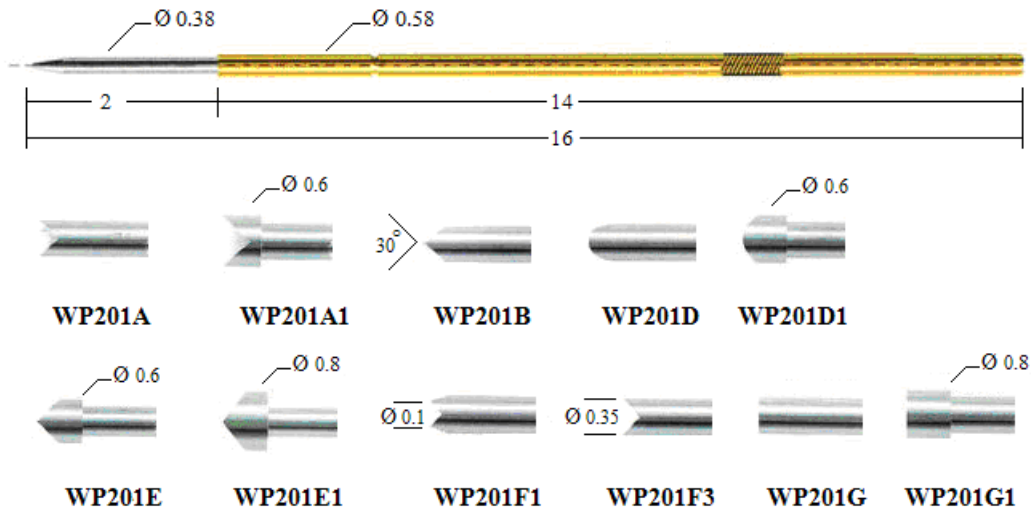

| WP 201 Current SPECIFICATION | |
|------------------------------|--------------------|
| Recommend minimum center | 1.00mm (0.394Inch) |
| Spring force at 2/3 travel | 50-80g |
| Recommend travel | 1.33mm |
| Current Rating | 2A |
| Current Resistance | <50mΩ |

| WP 201 Material | |
|-----------------|----------------------------------|
| Plunger | Rhodium plated high carbon steel |
| Barrel | Phosphor bronze, Gold plated |
| Spring | Gold plated S.W.P |

Socket

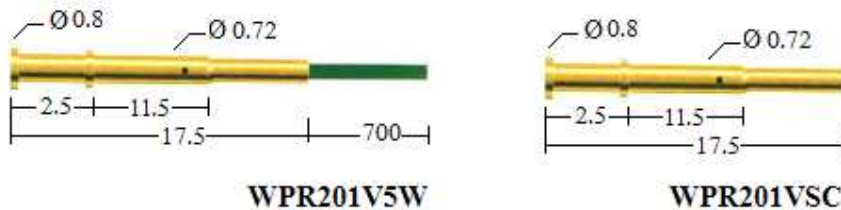

| WPR 201 SPECIFICATION | |
|-----------------------|--------------------|
| Mounting Hole size | 0.66mm (0.335Inch) |
| Material | Brass, Gold plated |
| Recommend wire | AWG 28-30 |