


WP 30LL SERIES


Probe

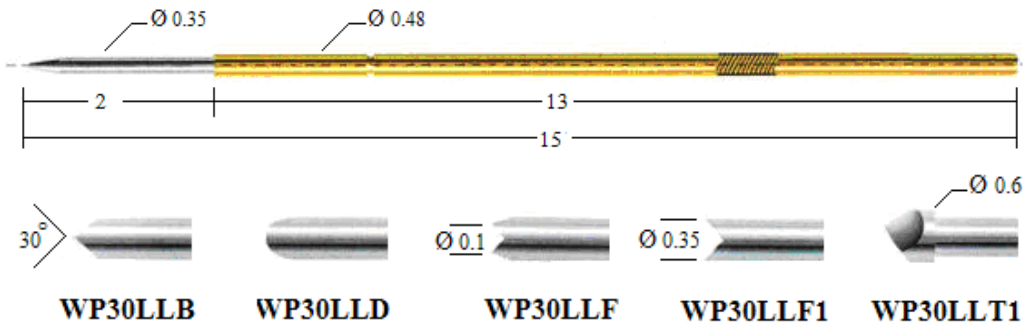

WP 30LL Current SPECIFICATION	
Recommend minimum center	0.85mm (0.335Inch)
Spring force at 2/3 travel	30-70g
Recommend travel	1.33mm
Current Rating	1A
Current Resistance	<50mΩ

WP 30 LL Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

Socket

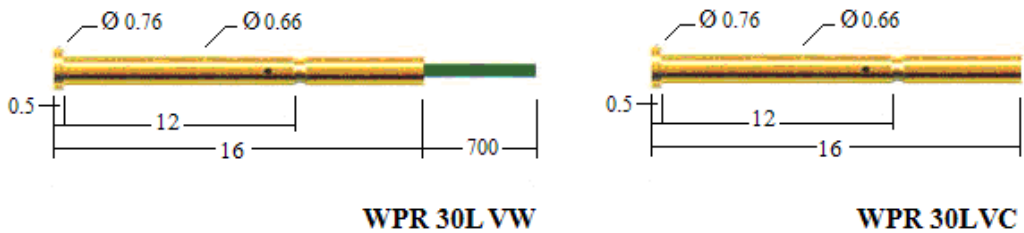

WPR 30LL SPECIFICATION	
Mounting Hole size	0.66mm (0.256Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30