


**WP 30LLL SERIES**


**Probe**

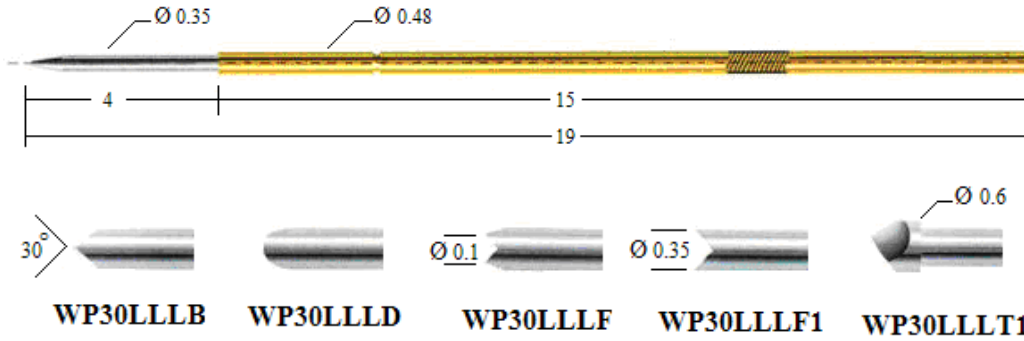

WP 30LLL Current SPECIFICATION	
Recommend minimum center	1.0mm (0.335Inch)
Spring force at 2/3 travel	30-70g
Recommend travel	2.66mm
Current Rating	3A
Current Resistance	<50mΩ

WP 30 LLL Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

**Socket**

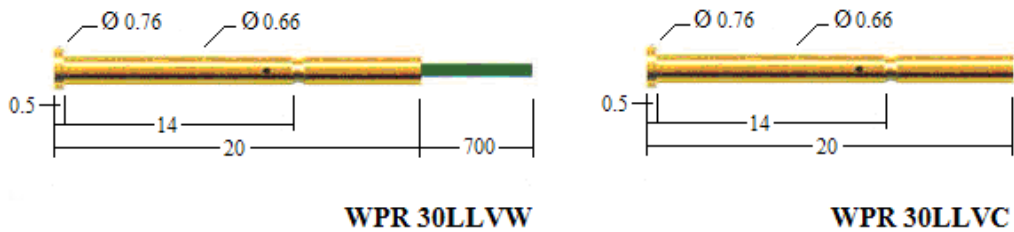

WPR 30LLL SPECIFICATION	
Mounting Hole size	0.65mm (0.335Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30