


## WP 50 SERIES


### Probe

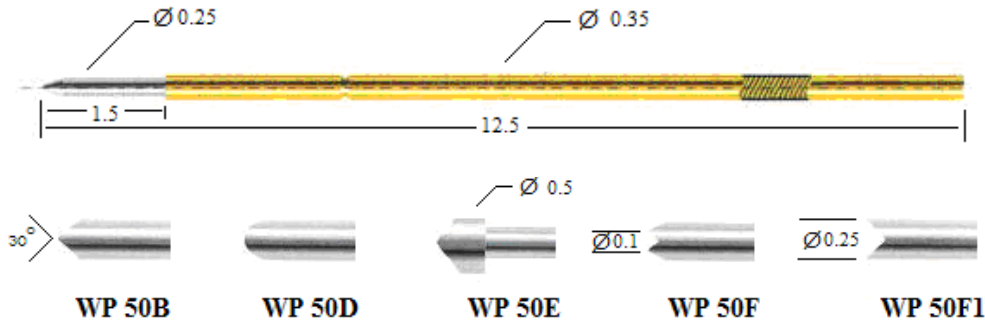

WP 50 Current SPECIFICATION	
Recommend minimum center	0.65 (0.0255Inch)
Spring force at 2/3 travel	30g, 60g
Recommend travel	1mm
Current Rating	1A
Current Resistance	<40mΩ

WP 50 Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

### Socket

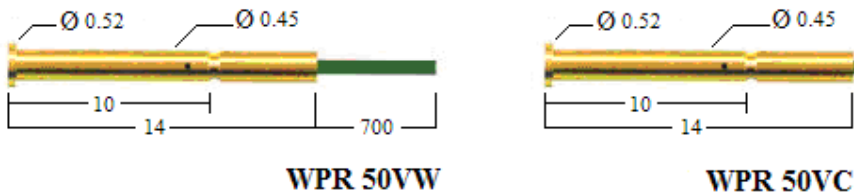

WPR 50 SPECIFICATION	
Mounting Hole size	0.47mm (0.0185Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30