


**WP 50L SERIES**


**Probe**

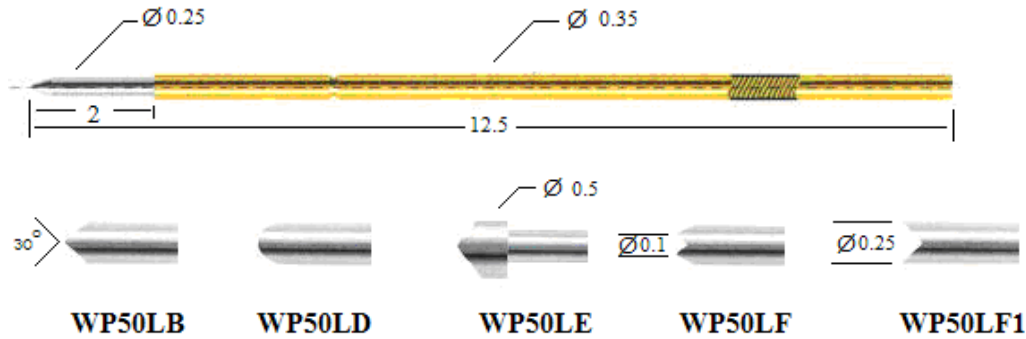

WP 50L Current SPECIFICATION	
Recommend minimum center	0.65 (0.0255Inch)
Spring force at 2/3 travel	30g, 60g
Recommend travel	1.33mm
Current Rating	1A
Current Resistance	<40mΩ

WP 50L Material	
Plunger	Rhodium plated high carbon steel
Barrel	Phosphor bronze, Gold plated
Spring	Gold plated S.W.P

**Socket**

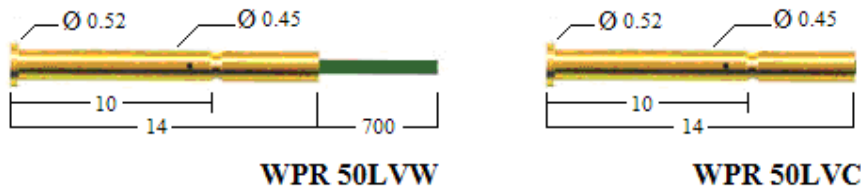

WPR 50L SPECIFICATION	
Mounting Hole size	0.47mm (0.0185Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30