


**WP 9 SERIES**

**Probe**

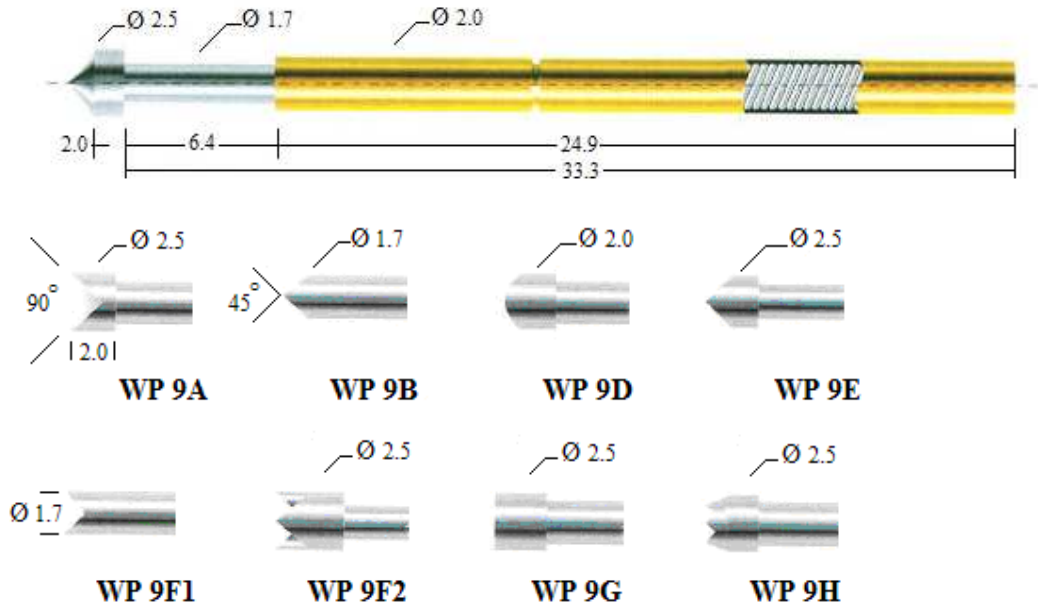


WP 9 Current SPECIFICATION	
Recommend minimum center	3.18mm (0.127Inch)
Spring force at 2/3 travel	150g, 200g
Recommend travel	4.5mm
Current Rating	5A
Current Resistance	30mΩ


WP 9 Material	
Plunger	Rhodium plated, Becu
Barrel	Phosphor bronze, Gold plated
Spring	Stainless Steel

**WP 9 SERIES**


**Socket**

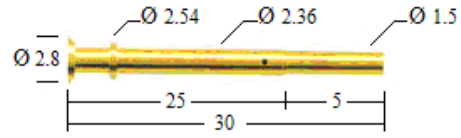


**WPR9VC**

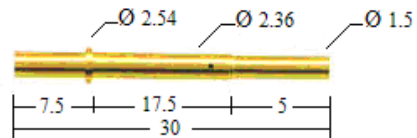


**WPR9WC**

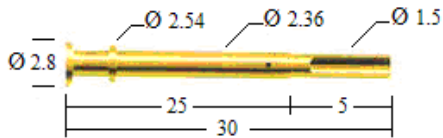


**WPR9VS**

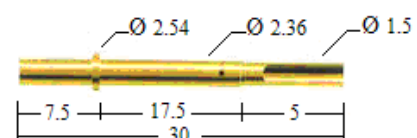

**WPR9WS**

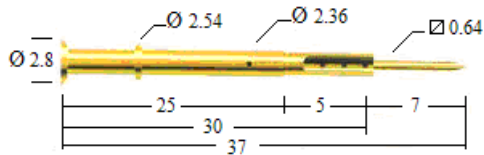

**WPR9V-2**

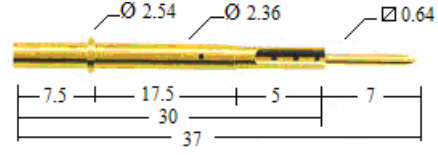

**WPR9W-2**

<b>WPR 9 SPECIFICATION</b>	
Mounting Hole size	2.44mm (0.096Inch)
Material	Brass, Gold plated
Recommend wire	AWG 28-30